



Each anomaly is split into horizontal and vertical components, and these are split into symmetrical & asymmetrical functions

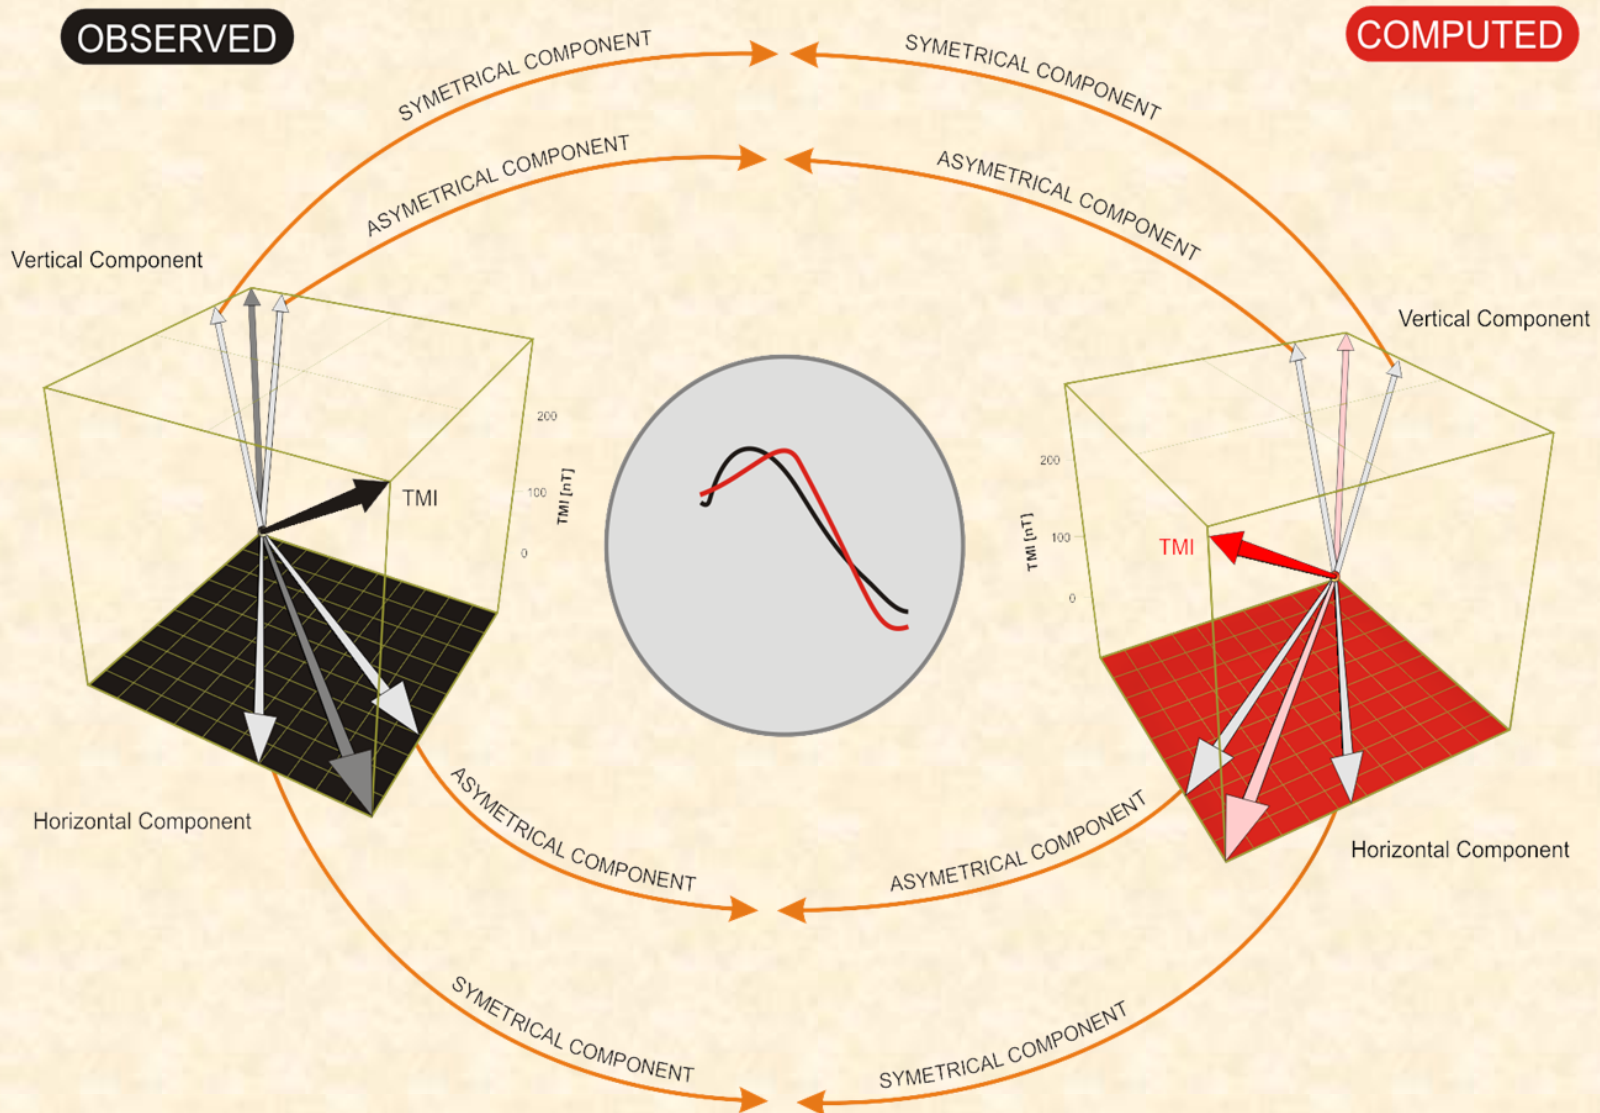

Four functions computed from observed anomalies are matched with four functions computed from theoretical bodies

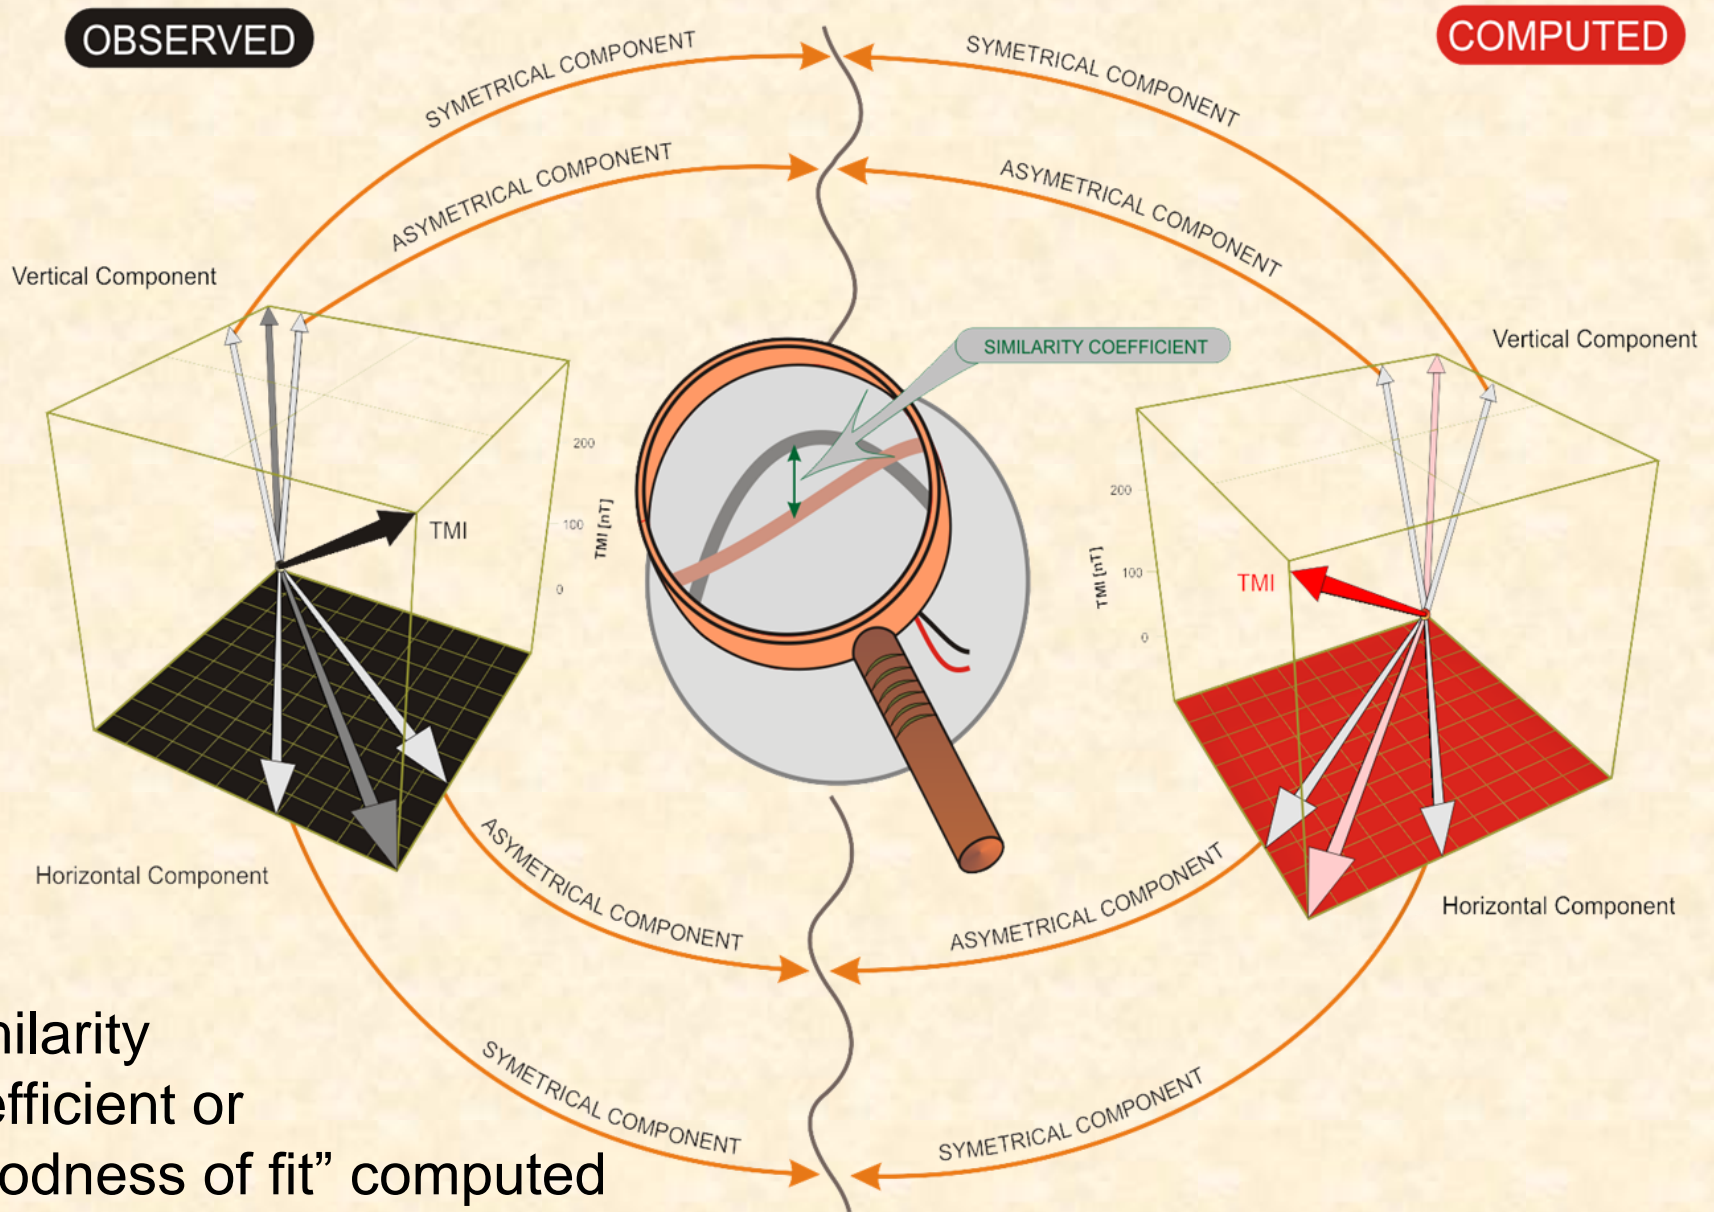

Similarity
coefficient or
“goodness of fit” computed